

## Informationen zum Produkt




## S6000V Siegelschale



Füllvolumen:	Maße:	Höhe:	Gewicht Becher, Deckel (+/-3%)	IML-Druck Becher	IML- Druck Deckel	Weiteres:
600ml	118x88mm	97mm	27,5g / 8g	ja	ja	Siehe Spez.
<ul style="list-style-type: none"> <li>• PP-Spritzguss-Siegelbecher mit Siegelrand (Zertifikat Lebensmittelsicherheit)</li> <li>• Standardausführung: klar mit klarem Deckel (Einfärbung in Standard-/Sonderfarben möglich)</li> </ul>						
Menge je Palette Schalen:	in 16 Boxen gepackt je:	Maß/Gewicht je Umkarton	Gewicht je Folienbag	Maß/Gewicht Einweg-Palette	Pal-Höhe	Weiteres:
7.200 St.	450 St.	580x380x280mm 400g	120g	1200x800x150mm 12kg	2,20m	Siehe Spez.
Menge je Palette Deckel:	in 24 Boxen gepackt je:	Maß/Gewicht je Umkarton	Gewicht je Folienbag	Maß/Gewicht Einweg-Palette	Pal-Höhe	Weiteres:
21.600 St.	900 St.	545x335x265mm 380g	120g	1200x800x150mm 12kg	2,20m	Siehe Spez.

Technical specification:

Tolerance:  
Weight/Volume +/- 5,0%  
Dimensions +/- 0,5 mm

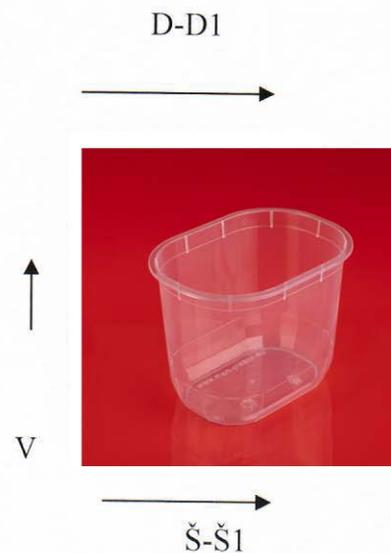

	Container	Lid
Volume up to the edge	600 ml.	
Material/weight	PP /27,5 g	PP /8 g
Top dimension D-D1	118x88 mm	122x91
Bottom dimension Š-Š1	87x58 mm	
Height with lid V	V 97 mm	11 mm
Number in 1 ct	450	900
Number of ct on 1 pal.	16	24
Note: under lid has to be foil		

Other characteristic

Uses:

containers with lids are intended for direct contact with watery, acidic, fat food products, which temperature is room and lower.

**Hot filling:**

packaging is suitable for contact with the hot filling (85°C-95°C) and short-term use in the microwave. Packaging must be tested by the customer with the actual product before to written approval for use at hot temperatures.

**Cold temperatures:**

packaging made from the special cold-resistant material can be used at temperatures -20°C. It is produced according to customer requirements. Packaging must be tested by the customer with the actual product before to written approval for use at low temperatures.

**Storage:**

suitable storage includes protection of direct sun light, rain, very high temperatures over a long period. Packaging must be not more than 2,4m in height and at least 1m away from heat source.

Recommended period of storage – 12 months after delivery to suitable storage.