

Informationen zum Produkt



300Q-M

Weitere Füllvolumen SERIE-M:

150ml – 200ml – 250ml

Auch mit Löffel im Deckel erhältlich:


150ml – 200ml – 250ml – 300ml



Füllvolumen:	Maße:	Höhe o.D.:	Gewicht Becher, Deckel (+/-3%)	IML-Druck Becher	IML-Druck Deckel	Weiteres:
300ml	95x95mm	58mm	13g / 6g	2 oder 4 Seiten, Boden	ja	Siehe Spez.
<ul style="list-style-type: none"> • PP-Spritzgussbecher mit Originalitätsverschluss (Zertifikat Lebensmittelsicherheit) • Standardausführung: klar mit klarem Deckel (Einfärbung in Standard-/Sonderfarben möglich) 						
Menge je Palette Schalen:	in 20 Boxen gepackt je:	Maß/Gewicht je Umkarton	Gewicht je Folienbag	Maß/Gewicht Einweg-Palette	Pal-Höhe	Weiteres:
16.000 St.	800 St.	520x385x435mm 550g	120g	1200x800x150mm 12kg	2,20m	Siehe Spez.
Menge je Palette Deckel:	in 60 Boxen gepackt je:	Maß/Gewicht je Umkarton	Gewicht je Folienbag	Maß/Gewicht Einweg-Palette	Pal-Höhe	Weiteres:
60.000 St.	1.000 St.	385x290x245mm 250g	100g	1200x800x150mm 12kg	2,20m	Siehe Spez.

Technical specification:

Tolerance: Weight/Volume +/- 5,0% Dimensions +/- 0,5 mm

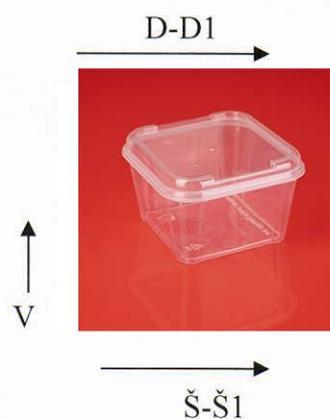

MART – container square 300ml, lid

	Container	Lid
Volume up to edge	300ml.	or art. nr. 10480 – higher lid
Material/weight	PP 13 g	PP 6 g
Top dimension D-D1	95x95mm	D1 93x93mm
Bottom dimension Š-Š1	74,6x74,6mm	
Height with lid V	V 57,8 mm	7,44 mm
Number in 1 ct	800	1000
Number of ct in 1 palette	16	60

Other characteristic

Uses:

containers with lids are intended for direct contact with watery, acidic, fat food products, which temperature is room and lower.

Hot filling:

packaging is suitable for contact with the hot filling (85°C-95°C) and short-term use in the microwave. Packaging must be tested by the customer with the actual product before to written approval for use at hot temperatures.

Cold temperatures:

packaging made from the special cold-resistant material can be used at temperatures -20°C. It is produced according to customer requirements. Packaging must be tested by the customer with the actual product before to written approval for use at low temperatures.

Storage:

suitable storage includes protection of direct sun light, rain, very high temperatures over a long period. Packaging must be not more than 2,4m in height and at least 1m away from heat source.

Recommended period of storage – 12 months after delivery to suitable storage.